


GALVANISED CAST IRON PULLEY

Type ETT-074




	Product:	ETT-074-50	ETT-074-60	ETT-074-70	ETT-074-80	ETT-074-100	ETT-074-120	ETT-074-150	ETT-074-180	ETT-074-210	ETT-074-240	ETT-074-300
	SKU:	155-2-1	155-2-2	155-2-3	155-2-4	155-2-5	155-2-6	155-2-7	155-2-8	155-2-9	155-2-10	155-2-11
Diameter of Pulley Ø (D)	(mm)	50	60	70	80	100	120	150	180	210	240	300
Diameter of Pulley Ø (d)	(mm)	37	46	56	65	83	100	130	160	185	206	265
Bore (B)	(mm)	6.2	6.2	8.2	8.2	10.2	12.2	14.2	14.2	16.5	16.5	16.5
Number of Ball Bearings	-	1	1	2	2	2	2	2	2	2	2	2
Load Capacity	(kg)	100	100	200	200	300	400	500	500	800	800	1000
Groove for Wire Cable Ø	(mm)	2.5	3	3	4	4	5	6.5	8	9	10	12
Flank Angle (<)	(°)	40	40	40	40	40	40	40	40	40	30	30
Fitting Width (N)	(mm)	19	19	26	26	30	30	34	34	38	38	38
Fixing Bolt	(mm)	6x35	6x35	8x45	8x45	10x55	12x60	14x65	14x65	16x70	16x70	16x70
Weight	(kg)	0.19	0.27	0.37	0.41	0.6	0.9	1.6	2.0	3.4	4.0	6.5

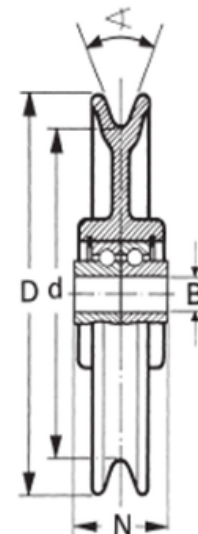

Features

- WEBI galvanised cast iron single pulley/sheave type **ETT-74**
- Complete with bearing and fixing bolt
- Capacities from 100kg to 1000 Kg
- To suit 2.5mm - 12mm diameter wire rope
- For use with manual and powered winches
- SWISS manufactured by "ETTER - Webi"
- This pulley is also available with various fixing options, see **ETT-160** (p2), **ETT-170** (p3) and **ETT-205** (p4)

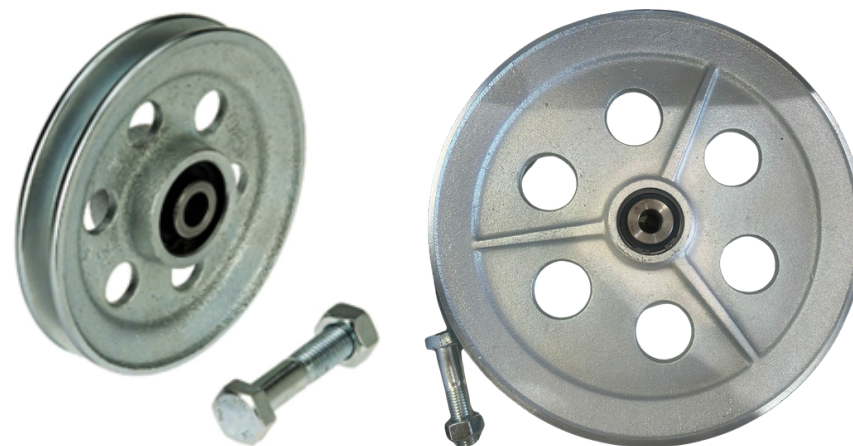

swissmade


*For guidance only - verify suitability before use. E&OE. V2-26

GALV. CAST IRON PULLEY WITH PRESSED STEEL BRACKET



Type ETT-160

	Product:	ETT-160-60	ETT-160-80	ETT-160-100	ETT-160-120
	SKU:	155-4-1	155-4-2	155-4-3	155-4-4
Diameter of Pulley Ø (D)	(mm)	60	80	100	120
Diameter of Groove for Wire Cable Ø	(mm)	3	4	4	5
Load Capacity	(kg)	100	200	300	400
Screw Fixing Surface	(mm)	62x35	76x40	110x60	100x70
Width between Fixing Holes (A)	(mm)	46	60.0	78.0	70.0
Height (H)	(mm)	66	88	109	130
Fixing Hole Distance (B)	(mm)	20	24	42	46
Screw Hole Diameter Ø	(mm)	5	6	7	10
Weight	(kg)	0.35	0.6	1.1	1.6

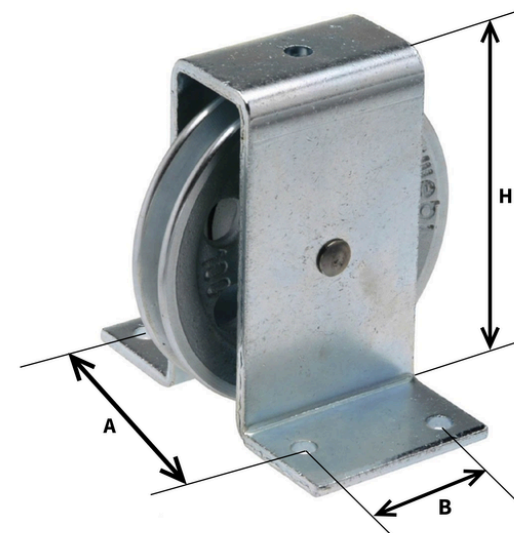

Features

- The WEBI **ETT-160** consists of the ETT-74 galvanised cast iron pulley fitted with ball bearings and galvanised steel housing
- Complete with bearing and fixing bolt
- Capacities from 100kg to 400kg
- To suit 3mm - 5mm diameter wire rope
- For full pulley dimensions, please see the **ETT-74** data sheet (p1)
- For use with manual and powered winches
- SWISS manufactured by "ETTER - Webi"



swissmade


*For guidance only - verify suitability before use. E&OE. V2-26

GALVANISED CAST IRON SIDE MOUNTED PULLEY

Type ETT-170




	Product:	ETT-170-50	ETT-170-60	ETT-170-80	ETT-170-100	ETT-170-120	ETT-170-150
	SKU:	155-3-1	155-3-2	155-3-3	155-3-4	155-3-5	155-3-6
Diameter of Pulley Ø (D)	(mm)	50	60	80	100	120	150
Diameter of Groove for Wire Cable Ø	(mm)	2.5	3	4	4	5	6.5
Load Capacity	(kg)	100	100	200	300	400	500
Screw Fixing Surface	(mm)	90x35	100x40	130x50	145x50	185x60	230x80
Width (A)	(mm)	74	84	112	132	160	200
Width (C)	(mm)	26	26	35	40	47	55
Fixing Hole Distance (B)	(mm)	20	24	32	32	40	56
Screw Hole Diameter Ø	(mm)	5	5	6	6	8	10
Weight	(kg)	0.25	0.35	0.7	0.9	1.5	2.8

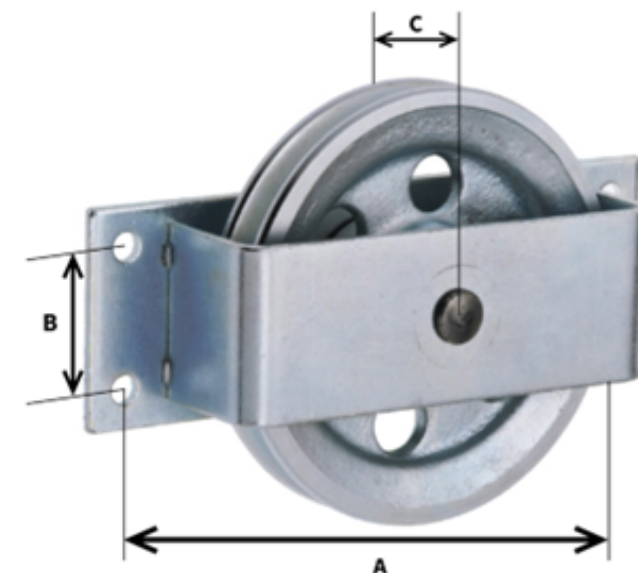

Features

- The WEBI **ETT-170** consists of the ETT-74 galvanised cast iron pulley fitted with ball bearings and galvanised steel housing
- Complete with bearing and fixing bolt
- Capacities from 100kg to 5000 Kg
- To suit 2.5mm - 5mm diameter wire rope
- For full pulley dimensions, please see the **ETT-74** data sheet (p1)
- For use with manual and powered winches
- SWISS manufactured by "ETTER - Webi"

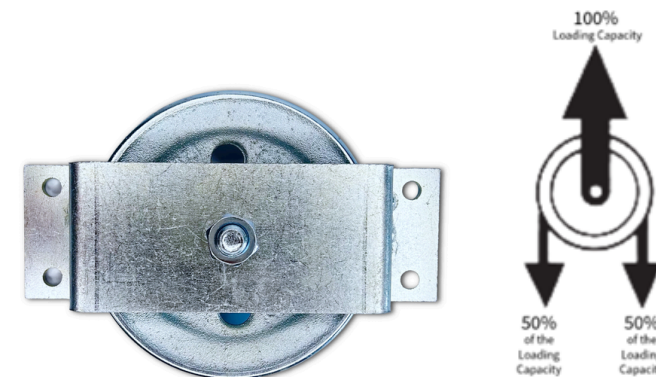

*For guidance only - verify suitability before use. E&OE. V2-26

RETURN PULLEY WITH ROTATING STEEL HOOK FOR WIRE CABLES

webi

Type ETT-205

	Product:	ETT-205
	SKU:	155-24-1
Diameter of Pulley Ø	(mm)	120
Hook's Load capacity	(kg)	400
Diameter of Groove for Wire Cable Ø	(mm)	5
Weight	(kg)	2.3



Features

- The WEBI **ETT-205** consists of the ETT-74 galvanised cast iron pulley fitted with ball bearings, galvanised sheet metal housing, lacquered and rotating steel hook with security spring.
- Fitted with ball bearing
- Steel return pulley/sheave for use on construction sites
- 400kg Capacity
- To suit 5mm diameter wire rope
- For full pulley dimensions, please see the **ETT-74** data sheet (p1)
- For use with wire cables
- SWISS manufactured by "ETTER - Webi"
- Not to be used for personal winching.



*For guidance only - verify suitability before use. E&OE. V2-26